




Pos.	Qty.	Description	Data sheet	Remarks.
1	(i)	Cable, Cat.7, S/FTP 4x2x26AWG/7, FRNC, blue	Belden 74005NH	
2	1	End A: IDC Connector ix, type A	HRS: IX30G-A-10S-CV (7.0)	acc. to IEC 61076-3-124
3	1	End B: RJ45 Keystone jack, CAT6A, shielded		acc. to IEC 60603-7

REV.	ECN NO.	DATE	BY	DESCRIPTION
01		11-11-2019	Initial Rev.	Released

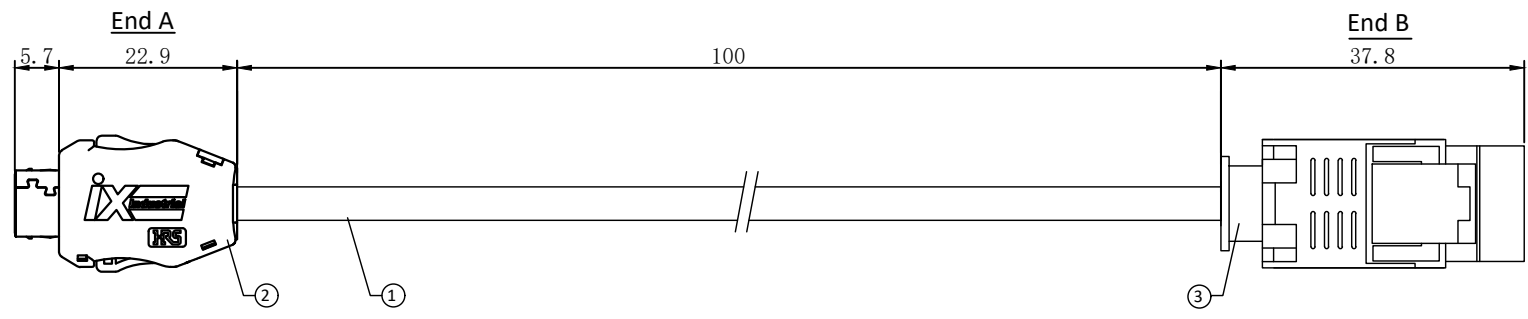

Wire map acc. to TIA/EIA 568B
(Contacts 3 & 8 not connected)

1	orange / white	1
2	orange	2
4	blue	4
5	blue / white	5
6	green / white	3
7	green	6
9	brown / white	7
10	brown	8
	shield	



Transmission support	
Category	ISO/IEC 11801 Cat.6A
1/10 GBs	IEEE 802.3ab/IEEE 802.3an
Electrical data	
Rated voltage / current	50 V AC / 60 V DC / 1 A
Contact resistance	50 mΩ
Mechanical data	
Operating temp.	-20 °C to +60°C
Mating cycles	200
Crimp strength	> 60N
RoHS	Compliant

L [m]	SB PN	MOQ
0.1	156024	1

THIS DRAWING CONTAINS CONFIDENTIAL INFORMATION AND IS THE PROPERTY OF SINBON HUNGARY LTD. IT MAY NOT BE USED OR ITS CONTENTS COPIED OR DISCLOSED TO A THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT AND IS TO BE RETURNED PROMPTLY UPON REQUEST BY SINBON HUNGARY LTD.

CUSTOMER : N/A		 SINBON SINBON HUNGARY Ltd.
CUSTOMER P/N : N/A	REV.	
DESCRIPTION : High Speed ix Industrial Patch Cable IX type A - keystone jack (RJ45)		PART NUMBER : 9007101001-72R/82
TOLERANCE : UNLESS OTHERWISE SPECIFIED) DRA. 11-11-2019 1 ~ 10 : ±1 11 ~ 30 : ±2 31 ~ 50 : ±3 51 ~ 200 : ±5 201 ~ 400 : ±7 > 401 : ±10 ANGLES : ±1°		
CHK. 11-11-2019 <i>Róbert Huszti</i>		REV. 1 SHEET 1 of 1
APR. 11-11-2019 <i>Gábor Bense</i>		