



Pos.	Qty.	Description	Data sheet	Remarks.
1	(i)	Cable, Cat.7, S/FTP 4x2x26AWG/7, FRNC, blue	Belden 74005NH	
2	1	End A: IDC Connector ix, type A	HRS: IX30G-A-10S-CV (7.0)	acc. to IEC 61076-3-124
3	1	End B: IDC Connector ix, type A	HRS: IX30G-A-10S-CV (7.0)	acc. to IEC 61076-3-124


For technical data of cable and/or connector please refer to their data sheets.

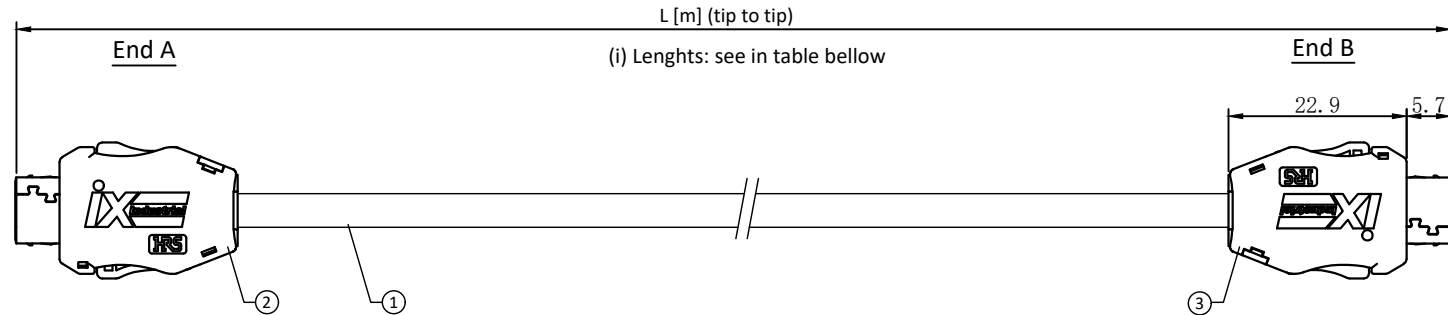

End A

Wire map acc. to TIA/EIA 568B
(Contacts 3 & 8 not connected)

1	orange / white	1
2	orange	2
4	blue	4
5	blue / white	5
6	green / white	6
7	green	7
9	brown / white	9
10	brown	10
	shield	



End B

Transmission support	
Category	ISO/IEC 11801 Cat.6A
1/10 GBs	IEEE 802.3ab/IEEE 802.3an
Electrical data	
Rated voltage / current	50 V AC / 60 V DC / 1 A
Contact resistance	30 mΩ
Mechanical data	
Operating temp.	-40 °C to +80°C
Mating cycles	5000
Crimp strength	> 60N
RoHS	Compliant

L [m]	SB PN	MOQ
0.1	154900	1
0.2	154901	1
0.5	154902	1
1.0	154899	1
2.0	154903	1
5.0	154904	1
10.0	154905	1
15.0	155984	1
20.0	155985	1
25.0	155986	1

THIS DRAWING CONTAINS CONFIDENTIAL INFORMATION AND IS THE PROPERTY OF SINBON ELECTRONICS CO., LTD. IT MAY NOT BE USED OR ITS CONTENTS COPIED OR DISCLOSED TO A THIRD PARTY WITHOUT PRIOR WRITTEN CONSENT AND IS TO BE RETURNED PROMPTLY UPON REQUEST BY SINBON ELECTRONICS CO., LTD.			
CUSTOMER P/N :		REV. A	 SINBON Electronics Co., Ltd.
DESCRIPTION :		High Speed ix Industrial Patch Cable ix type A - ix type A	
TOLERANCE :	DRA. 26 SEP 2019	CHK. 26 SEP 2019	PART NUMBER :
< 100 mm: +5 mm 101~200 mm: +10 mm 201~500 mm: +10 mm 501~1000 mm: +10 mm 1001~2000 mm: +20 mm 2001~5000 mm: +50 mm 5001~10000 mm: +100 mm	Róbert Huszti Elek Lukovics 26 SEP 2019 Gábor Bense	9000111###-72R/82 02	SIZE A3 UNIT mm SCALE NONE SHEET 1 of 1